

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 March 2003 (27.03.2003)


PCT

(10) International Publication Number
WO 03/026064 A1

- (51) International Patent Classification⁷: **H01Q 1/24** (72) Inventors: **BOYLE, Kevin, R.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **MASSEY, Peter, J.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/IB02/03630**
- (22) International Filing Date: **3 September 2002 (03.09.2002)** (74) Agent: **SCOTT, Kevin, J.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (25) Filing Language: **English** (81) Designated States (*national*): **CN, JP, KR.**
- (26) Publication Language: **English** (84) Designated States (*regional*): **European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LI, MC, NL, PT, SE, SK, TR).**
- (30) Priority Data: **0122226.4** **13 September 2001 (13.09.2001)** **GB** Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

[Continued on next page]

(54) Title: **WIRELESS TERMINAL**

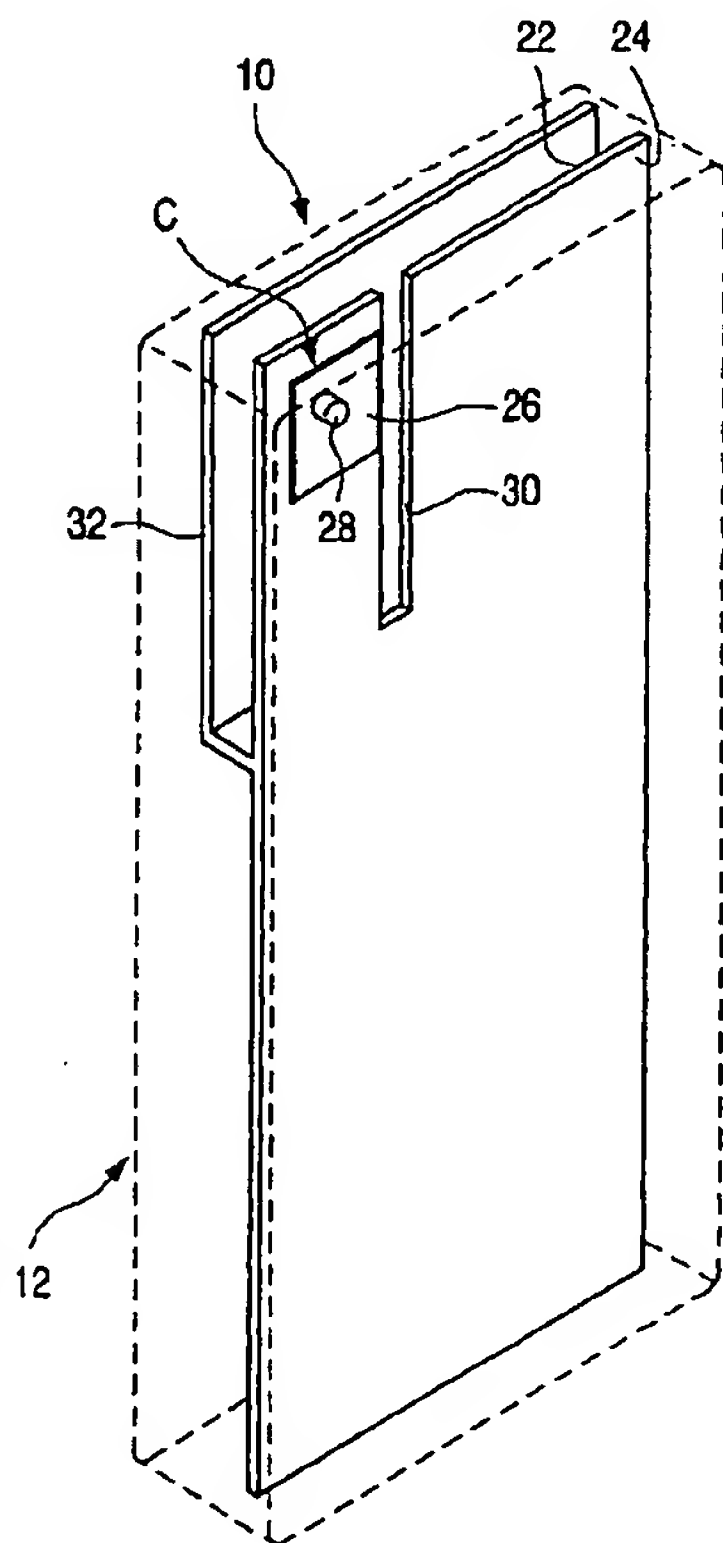

(57) Abstract: A capacitively back-coupled wireless terminal (10) comprises a PCB (22) having a ground conductor (24) on one surface. A back coupling capacitor (C) is carried by the ground conductor. An elongate slot (30) is provided in the ground conductor to widen the bandwidth. An electromagnetic shield (32) is provided on the side of the PCB (22) which in use is facing a lossy dielectric in order to reduce the SAR. The shield is disposed adjacent to, but spaced from, the slot (30) in the ground conductor and the back coupling capacitor. For narrowband operation the slot may be omitted and/or the spacing between the PCB (22) and the shield (32) may be reduced.

WO 03/026064 A1

BEST AVAILABLE COPY

WO 03/026064 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WIRELESS TERMINAL

Technical Field

5 The present invention relates to a wireless terminal having particular, but not exclusive, application as a cellular telephone or low power remote control terminal. More particularly the present invention relates to a wireless terminal having a planar antenna.

Background Art

10 Conventionally, planar inverted F antennas (PIFA) or similar are used to provide low SAR (Specific Absorption Rate) performance on handheld terminals such as mobile phones. PIFAs must have a relatively large distance, typically 8mm, between their top plate and the supporting PCB in order to having sufficient bandwidth for GSM (900 MHz) and DCS (1800 MHz)
15 operation. This limits the thickness of say the mobile phone.

 International Patent Application WO 02/13306 (Applicant's reference PHGB 010056WO) discloses a method of widening the bandwidth of a radio communication terminal which uses the handset as a radiator. More specifically in place of an antenna, a physically very small, back coupling
20 capacitor designed to have a large capacitance for maximum coupling and minimum reactance is used. The residual reactance of the back coupling capacitor can be tuned out with a simple matching circuit. With such an arrangement, the bandwidth can be greater than with a conventional antenna and handset combination because the handset acts as a low Q radiator.

25 The bandwidth can be improved by redesigning the handset case to increase the resistance in the return loss S_{11} after matching. This was simulated using the High Frequency Structure Simulator (HFSS) available from Ansoft Corporation. Experiments have shown that the length of the handset could be optimised to give a wide bandwidth centred on a particular frequency.
30 A transversely extending slot or longitudinally extending slot are means whereby for a fixed length handset, electrical shortening or lengthening can be

achieved. Examples of longitudinally extending slots are illustrated in Figures 11, 14 and 17 of the cited specification.

It is well known that in simulating the absorption of radiation, the human body resembles a lossy dielectric which absorbs electrical radiation. The local maxima of the body loss is measured by the SAR (Specific Absorption Rate) performance. Losses of radiated energy to the body represent a waste of energy which will needlessly reduce battery life prematurely without enhancing the overall performance of the terminal,

Disclosure of Invention

10 An object of the present invention is to improve the SAR of a capacitively back-coupled handset.

According to the present invention there is provided a wireless terminal comprising a printed circuit board having a ground conductor, a back-coupling capacitor mounted on the printed circuit board and including a plate electrode spaced from a surface of the printed circuit board, and a radiation blocking shield spaced from a side of the printed circuit board which in use faces a lossy side of the terminal.

The advantages of providing a shield are that the SAR is improved and that the shield can be placed relatively close to the printed circuit board in the handset which will enable the terminal, for example mobile telephone handset, to be slimmer and thereby more attractive to users.

An elongate slot may be provided in the ground conductor which will enable the operating frequency bandwidth of the terminal to be widened without the terminal having to be made thicker.

25 Brief Description of Drawings

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a diagrammatic perspective view from the back of an embodiment of a portable wireless terminal made in accordance with the present invention,

Figure 2 is a diagrammatic perspective view from the front of an embodiment of a portable wireless terminal made in accordance with the present invention,

Figure 3 is graph of simulated return loss S_{11} in dB against frequency f in GHz for the portable wireless terminal shown in Figures 1 and 2,

Figure 4 is a Smith chart showing the simulated impedance of the portable wireless terminal shown in Figures 1 and 2 over the frequency range 800.0 MHz to 3.0 GHz,

Figures 5 and 6 are graphs of real and imaginary parts of the antenna input impedance in ohms against frequency f in GHz, respectively, for the portable wireless terminal shown in Figures 1 and 2 having the shield in place,

Figure 7 is a sketch showing a portion of the printed circuit board with the plate of the capacitor covering a portion of the slot,

Figure 8 is a sketch showing a portion of the printed circuit board having the capacitor but no slot,

Figure 9 is a sketch showing a portion of the printed circuit board having the slot extending transversely of the printed circuit board, and

Figure 10 is a sketch showing the capacitor mounted in the space between the printed circuit board and the shield.

In the drawings the same reference numerals have been used to indicate corresponding features.

Modes for Carrying Out the Invention

The embodiment of the wireless terminal shown in Figures 1 and 2 comprises a capacitively back-coupled handset 10 suitable for use as a cellular or cordless telephone. The handset 10 has an external plastics housing 12, shown in broken lines, on the front side of which are provided an aperture 14 for access to a microphone (not shown), apertures 16 for access to a loudspeaker (not shown), a LCD panel 18 and a keypad 20.

Within the housing 12 is mounted an elongate printed circuit board 22 carrying on at least one surface electronic components (not shown) required for the control of the handset 10 and for the associated processing of transmitted and received speech and data signals. At least a portion of the

other surface of the circuit board 22 facing the back of the handset is metallised to provide a ground plane 24.

The illustrated handset does not have a dedicated, separate antenna but has a physically small back-coupling capacitor C designed to have a large capacitance for maximum coupling and minimum reactance. The residual reactance of the back-coupling capacitor can be tuned out with a simple matching circuit, for example a series inductor followed by a shunt inductor. By correct design of the handset 10, the bandwidth can be much greater than with a conventional antenna and handset combination, because the handset acts as a low Q radiating element (simulations show a typical Q is around 1), whereas conventional antennas typically have a Q of around 50.

The capacitor C comprises a parallel plate capacitor formed by a first plate consisting of a 10mm x 10mm plate 26 mounted on an insulated support 28 above the corner of the ground plane 24 which constitutes a second plate of the capacitor. The first plate 26 of the capacitor is fed by way of a transmission line (not shown) which extends through the support 28. The resulting capacitance is of the order of 0.5pF, representing a compromise between capacitance (which would be increased by reducing the separation of the plate 26 and the ground plane 24) and the coupling effectiveness (which depends on the separation of the plate 26 and the ground plane).

In order to increase the bandwidth of the handset 10, a longitudinally extending slot 30 is provided in the circuit board 22. The slot 30 is parallel to the length, or major axis, of the circuit board. The dimensions of the slot 30 are chosen having regard to the desired bandwidth of the handset 10 and for combined GSM and DCS operation, the dimensions may typically be 3mm wide and 29.5mm long, the circuit board typically being 100mm x 40mm x 1mm.

An electrically conductive shield 32 is mounted on, and connected electrically to, the circuit board 22 so as to extend parallel to, but spaced from, the portion of the circuit board in which the slot 30 and the capacitor C are provided. The spacing between the shield 32 and the circuit board 22 is of the order of 4mm. The depth of the spacing is dependent on factors such as

bandwidth. Thus if the spacing is smaller than 4mm, the bandwidth is narrower. As a consequence a phone for use on a single standard as opposed to two or more standards may be slimmer.

The shield 32 need not extend across the entire width of the circuit board 22 but it should cover the capacitor C and the slot 30. The shield 32 may be mounted in any convenient way such as with screws and spacers or with adhesives.

Simulations of a handset having a shield 32 have shown a significant reduction in the magnetic field strength on the side containing the loudspeaker earpiece, that is, the apertures 16. This in turn leads to a lower SAR and less power loss to the user of the handset. The overall thickness of the handset can be thinner compared to a handset not having a shield.

Figure 3 illustrates the return loss S_{11} using the High Frequency Structure Simulator (HFSS), available from Ansoft Corporation, with the results shown between 0.5 and 3.0 GHz. The matching network comprised a series inductor of 4nH followed by a shunt inductor of 4nH. The 6dB bandwidth between the frequencies $m1$ and $m2$, namely 1.823 and 2.065 GHz, is approximately 200 MHz and the 3db bandwidth is significantly wider. Also due to the shape of the S_{11} response with frequency, the bandwidth can be widened with a parallel LC tuned circuit (with an easily realisable, small inductance value. Such a circuit also has a useful filtering function.

The Smith chart shown in Figure 4 relates to a frequency band of 800.0 MHz to 3.00GHz and the 6dB bandwidth is shown between the frequencies $m1$ and $m2$, namely 1.823 and 2.065 GHz.

Figures 5 and 6 are graphs showing the real and imaginary parts of the antenna input impedance plotted against frequency when the shield is present. These graphs confirm what is shown in the Smith chart.

SAR simulations of the handset embodiment shown in Figures 1 and 2 were performed at 1800 MHz with the handset in close proximity to a simple flat phantom, orientated in the same plane as the PCB 22 (i.e. parallel to it). The dielectric constant and conductivity of the phantom were respectively $\epsilon_r = 40$ and $\sigma = 1.4S/m$. Three sets of results were generated, the first without

the shield 32 and with the circuit board 22 spaced from the phantom by 5mm, the second with the shield 32 present and touching the phantom, and the third with the shield present and spaced from the phantom by 1mm. The following results were obtained for SAR in W/kg:

Antenna	Accepted Power (W)	SAR at 1W accepted power		
		Peak	1 gram	10 gram
Unshielded	0.280	73.4	37.2	18.2
Shielded, touching	0.284	22.8	8.56	5.03
Shielded, 1mm spacing	0.274	19.1	11.5	7.03

5 These results demonstrate that the shield 32 provides a considerable reduction in SAR, typically reducing it to around 30% of the value without a shield. This confirms the reduction in SAR that would be expected from Figures 3 to 6.

10 Figure 7 is a variant of the embodiment shown in Figures 1 and 2 in that the plate 26 of the capacitor C overlaps the slot 30. Also for the sake of illustration the shield, shown in broken lines, does not extend over the entire width of the printed circuit board 32. The width of the shield 32 is independent of the width of the slot 30 and/or the size of the plate 26, as long as the plate 26 is covered.

15 The embodiment shown in Figure 8 does not have a slot 30. However a shield 32 is provided and covers the plate 26 of the capacitor. Such an embodiment is suited to narrow bandwidth operation, for example in a terminal operating in accordance with a single standard, such as GSM or DCS.

20 Although in the embodiments described with reference to Figures 1, 2 and 7 the slot 30 in the ground plane has been shown extending longitudinally of the printed circuit board 22, it may extend in other directions, such as transversely of the elongate printed circuit board subject to the orientation of the shield 32 being changed accordingly. This is illustrated in Figure 9 of the accompanying drawings.

25 Referring to Figure 10, this illustrates that the capacitor C can be located on the side of the printed circuit board 22 facing the shield 32.

In all the embodiments of the invention, the dielectric of the capacitor C can be of any suitable type. However it is necessary that one of the electrodes is a plate.

In the present specification and claims the word "a" or "an" preceding an
5 element does not exclude the presence of a plurality of such elements. Further,
the word "comprising" does not exclude the presence of other elements or steps
than those listed.

From reading the present disclosure, other modifications will be
apparent to persons skilled in the art. Such modifications may involve other
10 features which are already known in the design, manufacture and use of
capacitively back-coupled wireless terminals and component parts therefor
and which may be used instead of or in addition to features already described
herein.

CLAIMS

1. A wireless terminal comprising a printed circuit board having a
5 ground conductor, a back-coupling capacitor mounted on the printed circuit board and including a plate electrode spaced from a surface of the printed circuit board, and a radiation blocking shield spaced from a side of the printed circuit board which in use faces a lossy side of the terminal.
- 10 2. A terminal as claimed in claim 1, characterised in that the back-coupling capacitor is a parallel plate capacitor and in that a portion of the ground conductor comprises a second plate electrode.
3. A terminal as claimed in claim 1 or 2, characterised in that an
15 elongate slot is provided in the ground conductor and in that the shield is coextensive with at least the entire length of the slot.
4. A terminal as claimed in claim 1 or 2, characterised in that an
20 elongate slot is provided in the ground plane, in that the back-coupling capacitor is positioned adjacent the slot, and in that the shield is mounted adjacent to, but spaced from, the slot and the back-coupling capacitor and covers the slot.
5. A terminal as claimed in claim 1 or 2, characterised in that an
25 elongate slot is provided in the ground plane, in that the plate electrode of the back-coupling capacitor is positioned to cover at least part of the slot, and in that the shield is mounted adjacent to, but spaced from, the slot and the back-coupling capacitor and covers the slot.
- 30 6. A terminal as claimed in claim 3, 4 or 5, characterised in that the printed circuit board is elongate and the slot is parallel to the major axis of the printed circuit board.

7. A terminal as claimed in any one of claims 1 to 6, characterised by a loudspeaker and in that the shield is juxtaposed behind the loudspeaker to prevent radiation propagating towards the loudspeaker.

1/3

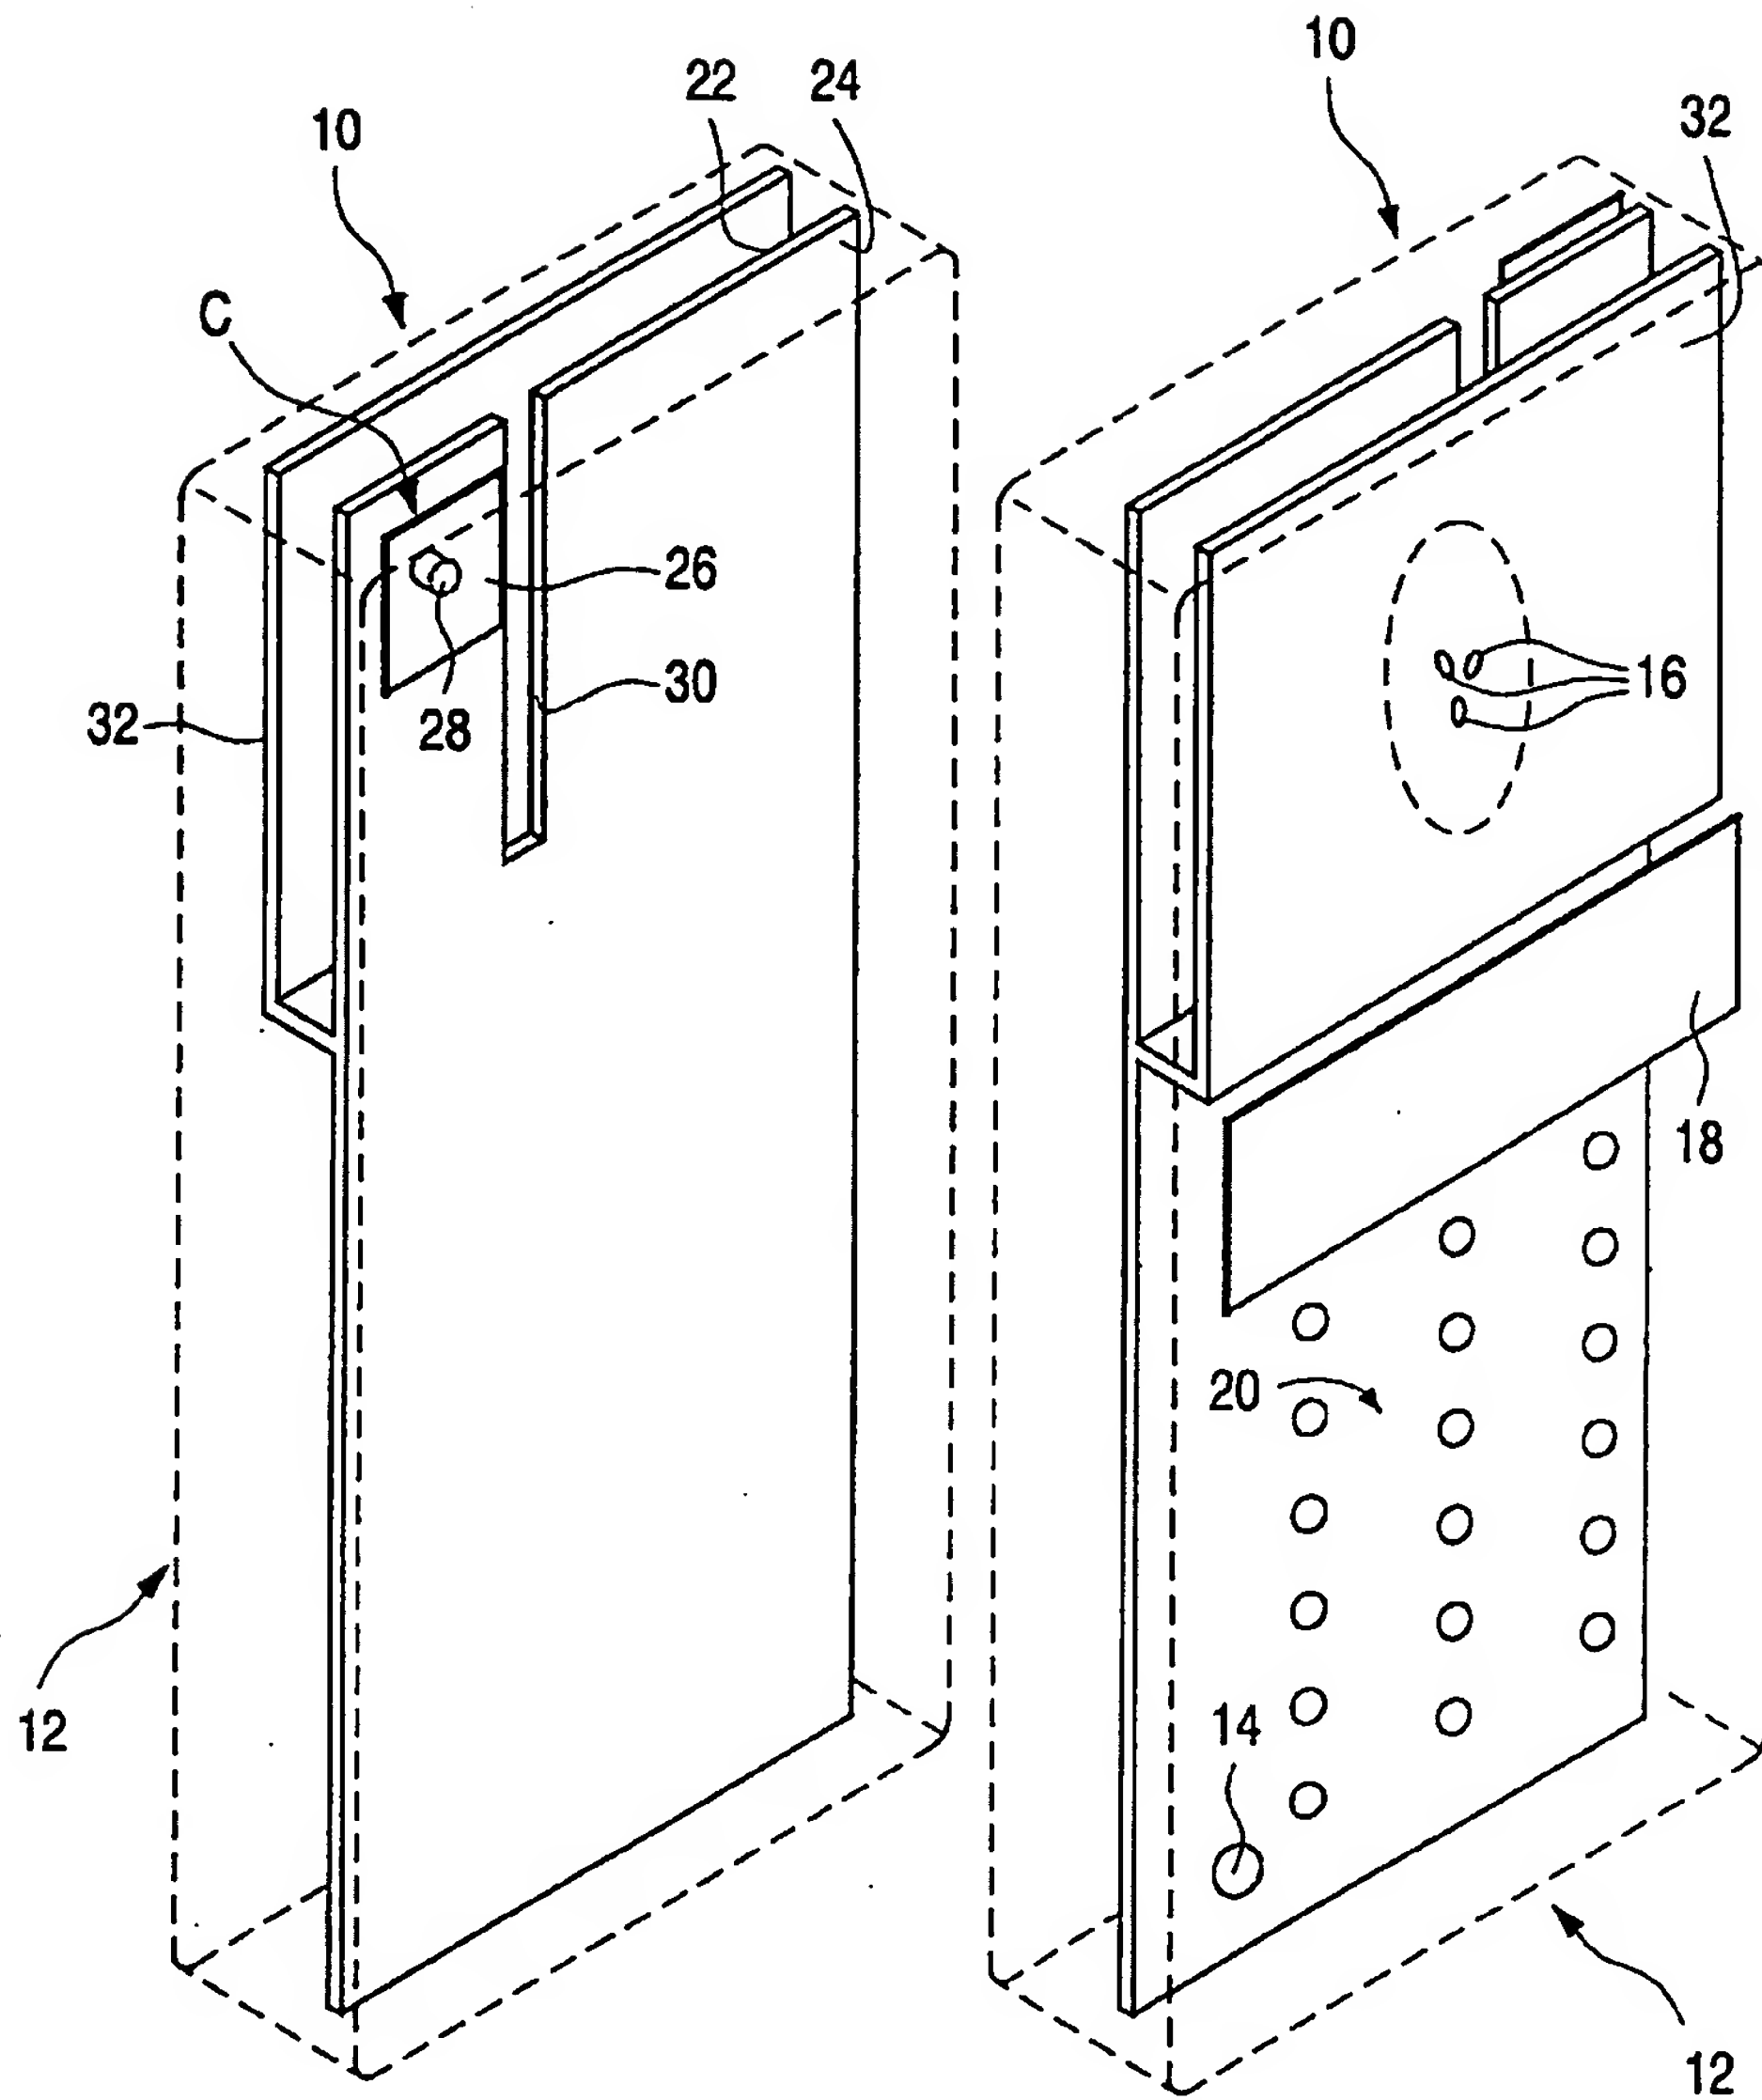


Fig.1.

Fig.2

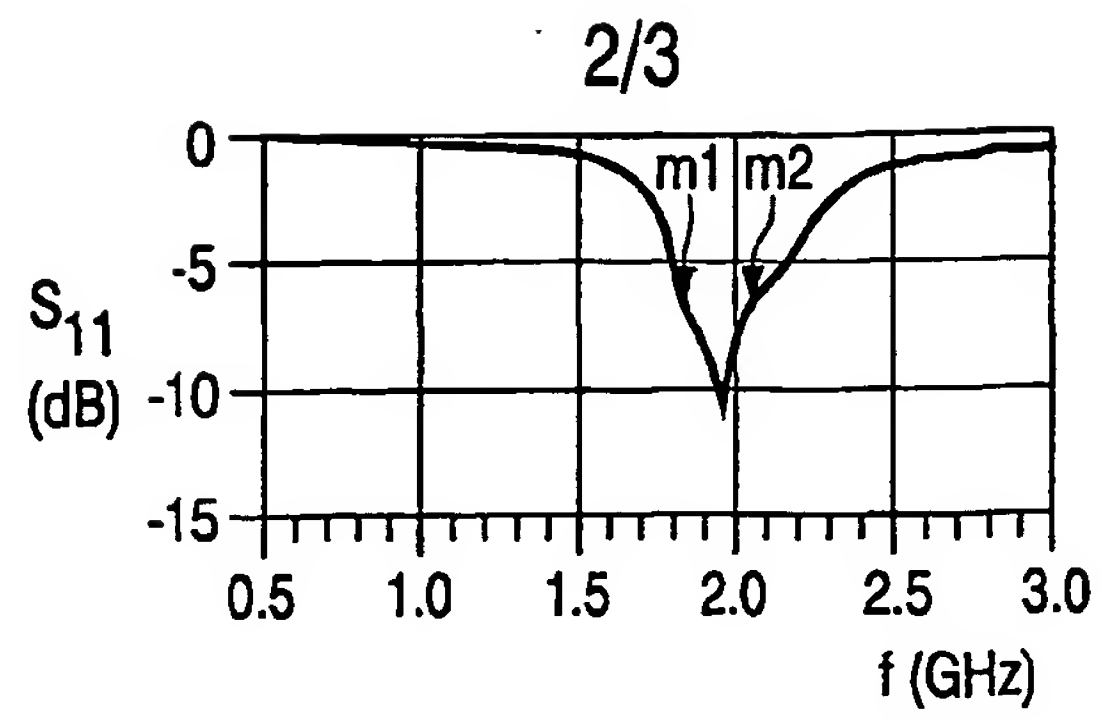


Fig.3

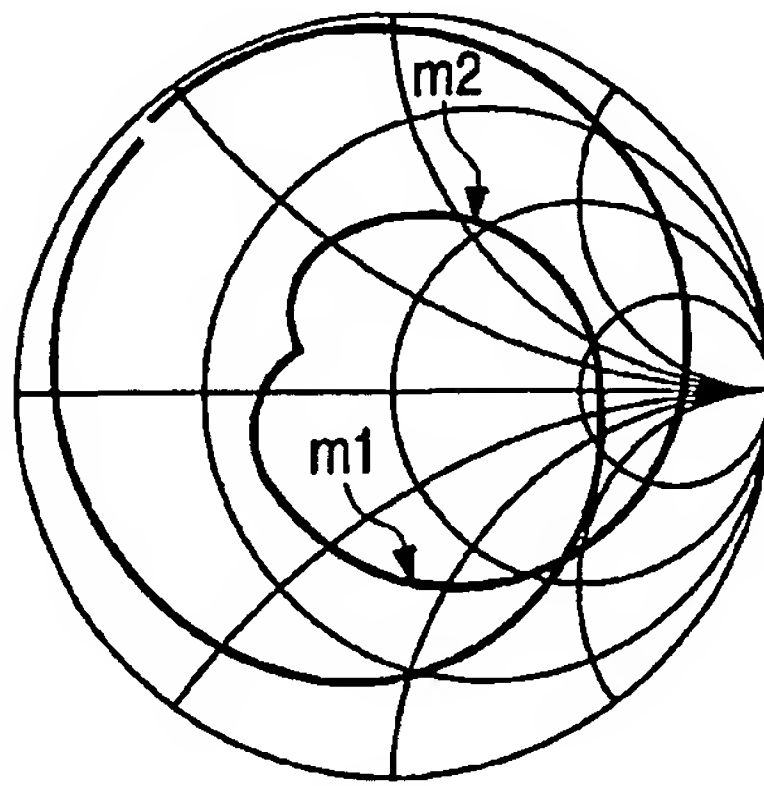


Fig.4

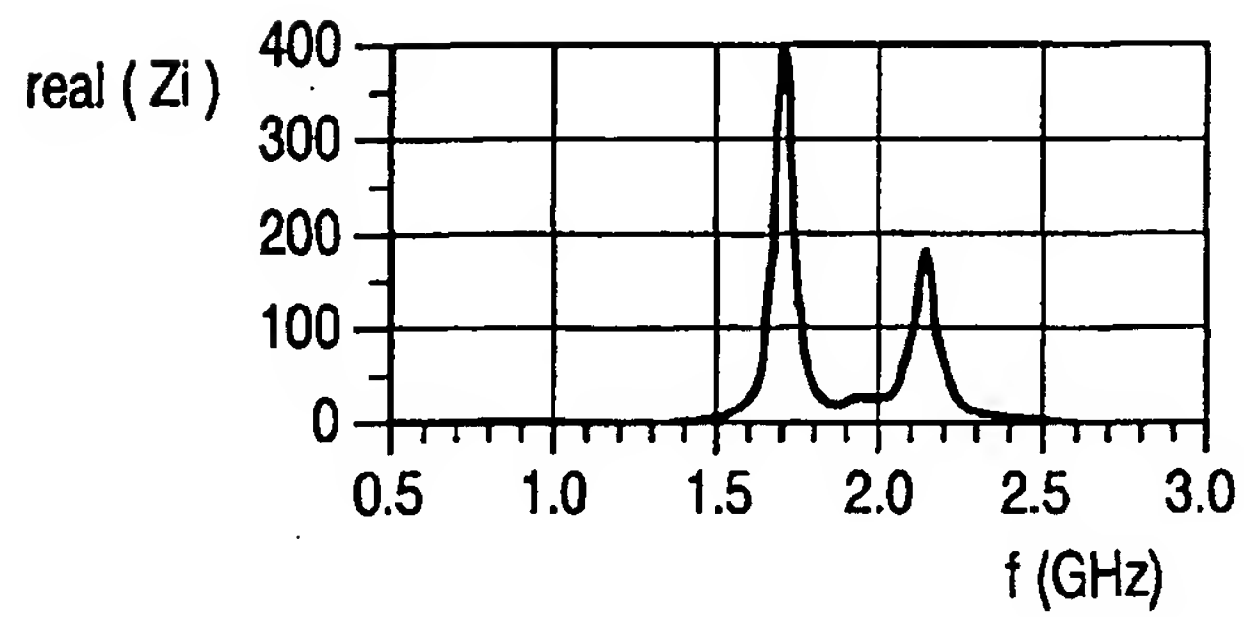


Fig.5

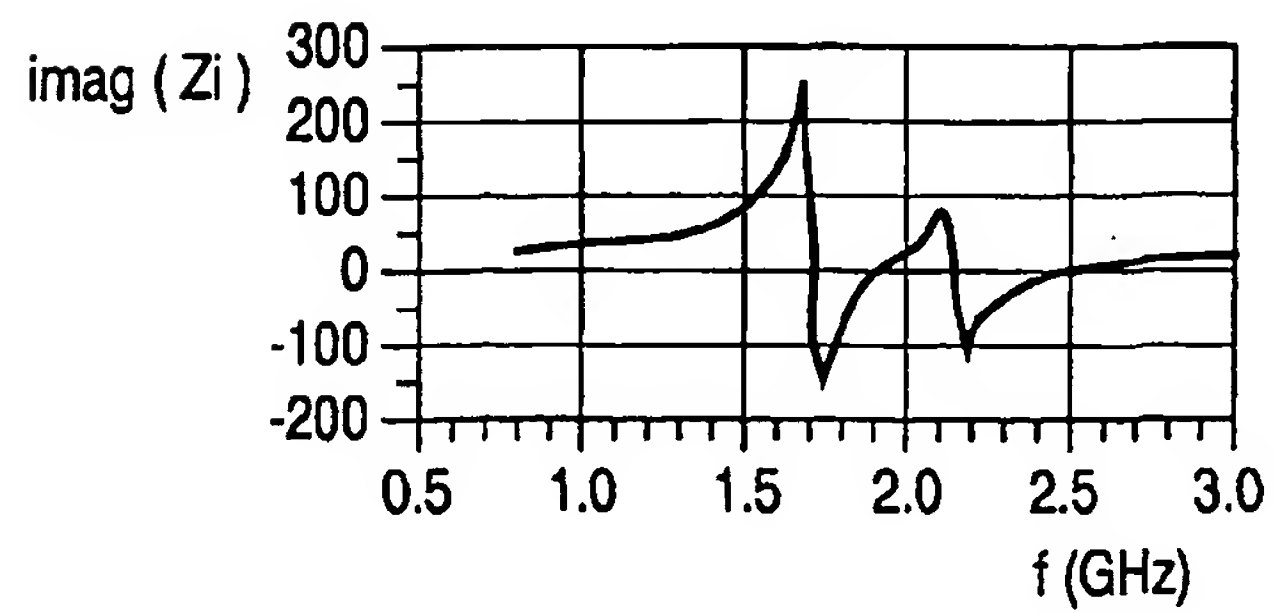


Fig.6

3/3

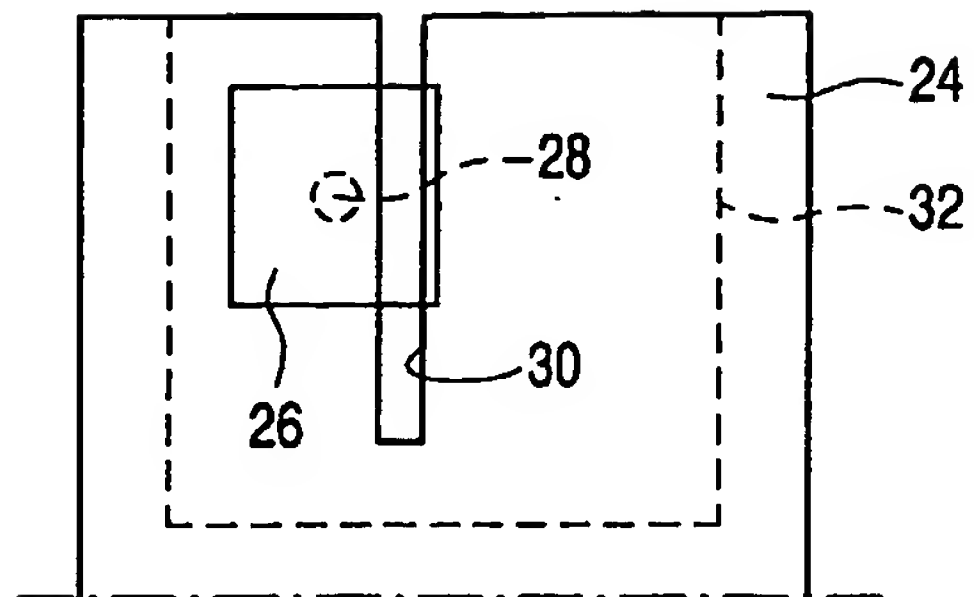


Fig.7

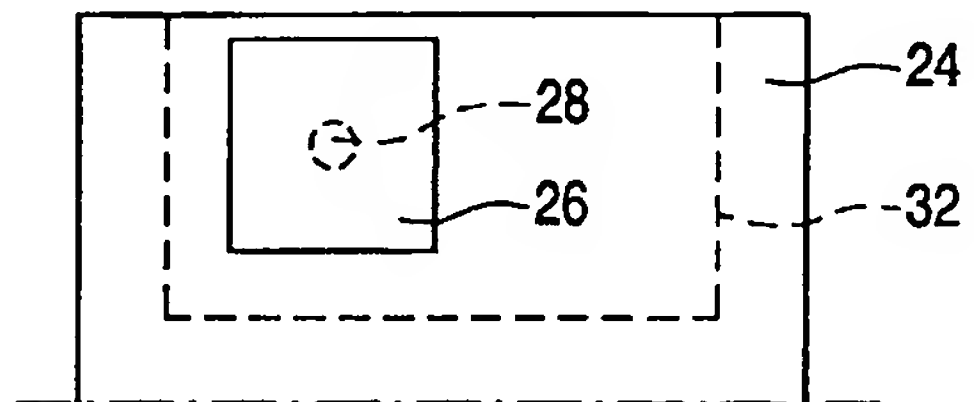


Fig.8

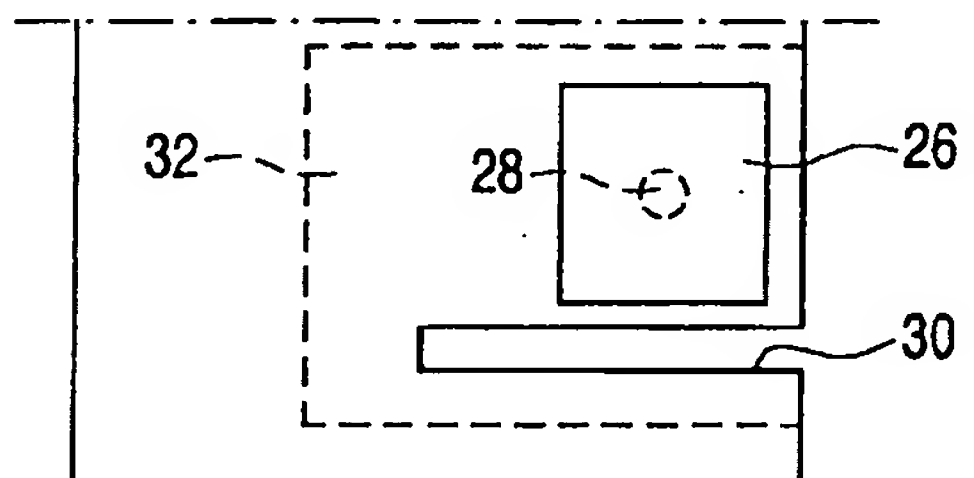


Fig.9

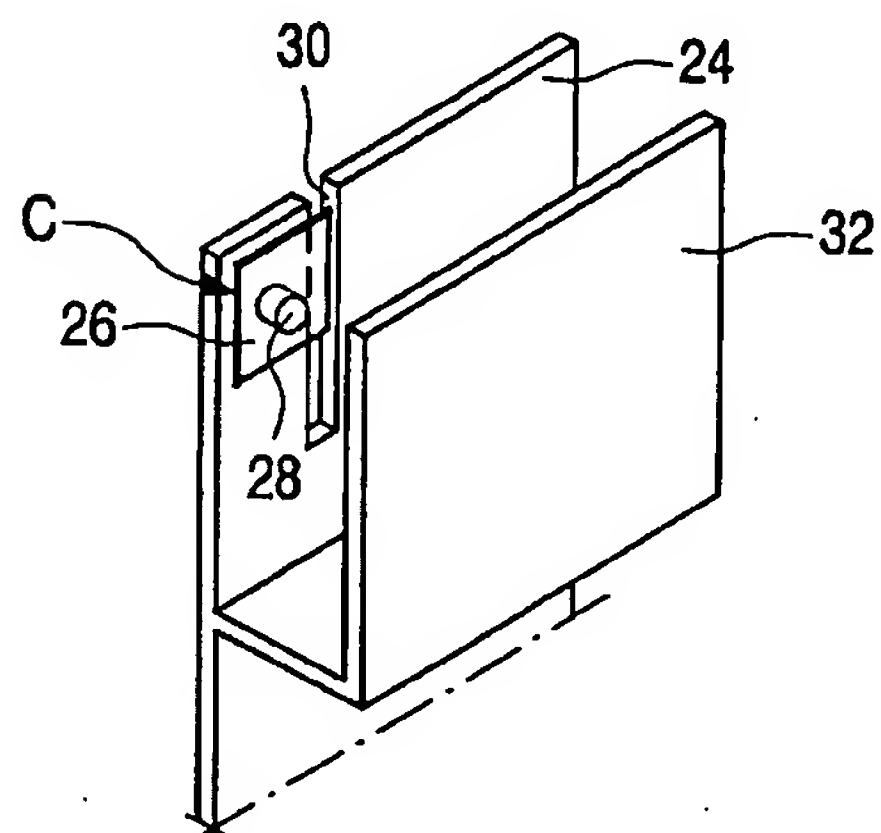


Fig.10

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/IB 02/03630

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01Q1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 986 130 A (SIEMENS AG) 15 March 2000 (2000-03-15) the whole document ---	1-7
Y	EP 1 018 779 A (LK PRODUCTS OY) 12 July 2000 (2000-07-12) figure 10 ---	1-7
Y	EP 1 132 998 A (SONY CORP) 12 September 2001 (2001-09-12) figure 1 ---	1-7
Y	US 5 764 190 A (MURCH ROSS DAVID ET AL) 9 June 1998 (1998-06-09) figure 2 --- -/--	1-7

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

9 January 2003

Date of mailing of the international search report

16/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Johansson, R

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/IB 02/03630

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 05, 30 May 1997 (1997-05-30) & JP 09 027711 A (FUJITSU LTD), 28 January 1997 (1997-01-28) abstract ---	1-7
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) & JP 2000 101333 A (SONY CORP), 7 April 2000 (2000-04-07) abstract ---	1-7
A	US 4 723 305 A (PHILLIPS JAMES P ET AL) 2 February 1988 (1988-02-02) abstract ---	1-7
A	US 5 903 822 A (MAEDA TADAHIKO ET AL) 11 May 1999 (1999-05-11) abstract ---	1-7
P,Y	WO 02 37600 A (ERICSSON TELEFON AB L M ;LINDELL BO (SE)) 10 May 2002 (2002-05-10) abstract; figure 2 ---	1-7
P,Y	WO 02 13306 A (KONINKL PHILIPS ELECTRONICS NV) 14 February 2002 (2002-02-14) abstract ---	1-7
P,Y	WO 02 063712 A (KONINKL PHILIPS ELECTRONICS NV) 15 August 2002 (2002-08-15) abstract ---	1-7
P,Y	WO 02 065582 A (KONINKL PHILIPS ELECTRONICS NV) 22 August 2002 (2002-08-22) abstract -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IB 02/03630

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0986130	A	15-03-2000	CN	1249546 A	05-04-2000
			EP	0986130 A2	15-03-2000
EP 1018779	A	12-07-2000	FI	990006 A	06-07-2000
			CN	1259775 A	12-07-2000
			EP	1018779 A2	12-07-2000
			US	6252552 B1	26-06-2001
EP 1132998	A	12-09-2001	JP	2001257522 A	21-09-2001
			CN	1315755 A	03-10-2001
			EP	1132998 A2	12-09-2001
			US	2002005808 A1	17-01-2002
US 5764190	A	09-06-1998	NONE		
JP 09027711	A	28-01-1997	NONE		
JP 2000101333	A	07-04-2000	NONE		
US 4723305	A	02-02-1988	US	4672685 A	09-06-1987
			EP	0258277 A1	09-03-1988
			JP	63502317 T	01-09-1988
			WO	8704307 A1	16-07-1987
US 5903822	A	11-05-1999	DE	69220344 D1	17-07-1997
			DE	69220344 T2	06-11-1997
			EP	0548975 A1	30-06-1993
			JP	3251680 B2	28-01-2002
			JP	5327527 A	10-12-1993
			KR	9604599 B1	09-04-1996
			US	5517676 A	14-05-1996
WO 0237600	A	10-05-2002	AU	2631302 A	15-05-2002
			WO	0237600 A1	10-05-2002
			SE	0003951 A	28-04-2002
			US	2002053991 A1	09-05-2002
WO 0213306	A	14-02-2002	WO	0213306 A1	14-02-2002
			US	2002037739 A1	28-03-2002
WO 02063712	A	15-08-2002	WO	02063712 A1	15-08-2002
			US	2002180648 A1	05-12-2002
WO 02065582	A	22-08-2002	WO	02065582 A1	22-08-2002
			US	2002146988 A1	10-10-2002